




# bioplex

**Synthetic & Biodegradable  
Multi Purpose Grease**

**NLGI 2**

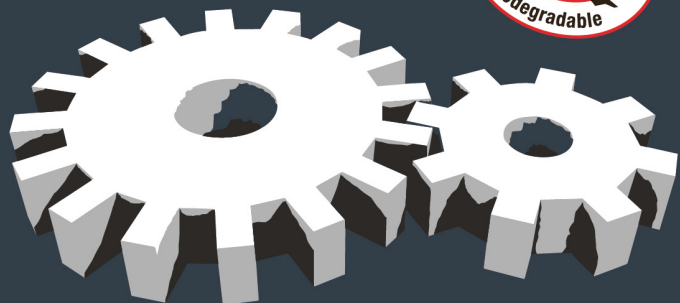

## Bioplex NLGI 2 | Biodegradable lithium complex grease

### Property

- greater corrosion protection
- stable lubricating film reduces wear
- high stability and pressure resistance thanks to EP additives
- extreme water resistance

### Application area

- universal applications
- also suitable for wheel bearings on vehicles with disk brakes
- continuous operation from -30°C to +140°C; Short period max. +180°C

### Biodegradability

- 90% in 21 days (CEC L-33-A93)
- 85% in 28 days (OECD 301B)

### Note

- Technical data subject to change without notice. Please observe the vehicle or machine manufacturer's directions. Please refer to the safety data sheet for further information.

### Typical properties

Eigenschaft	Einheit	Wert
NLGI Grade	-	2
Color	-	brown
Type of soap	-	Lithium Complex
Worked penetration ASTM D217	0.1mm	275
Dropping point	°C	280
4-ball weld load	N	2800

### Available packaging

Case 12 x 400 g cartridges	
----------------------------	--

### Specifications

DIN KEP2N-30
ISO-L-XCDIB 2
NLGI GC-LB
Swedish Standard SS 15 54 34